


# Fastmesh-358™

When Security Matters

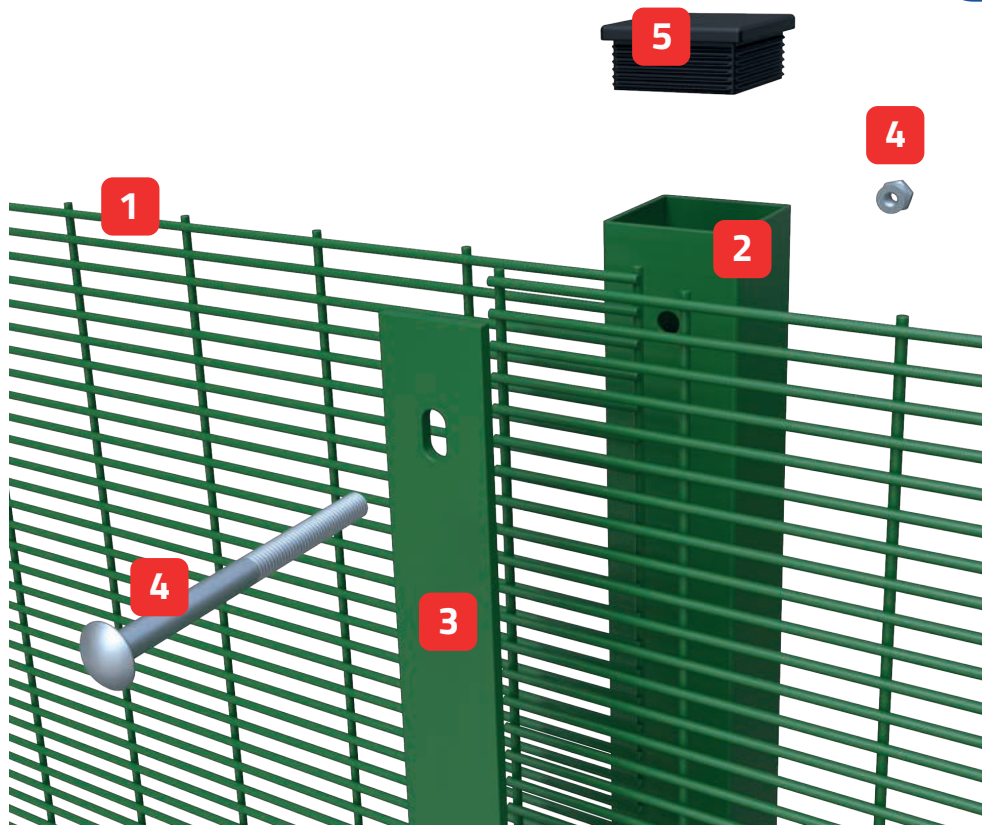

**1** Welded mesh, anti-climb, security panel.

**2** High strength galvanised steel post, pre (through) drilled to suit mesh apertures.

**3** High strength, steel clamp bar, pre slotted to facilitate ease of erection.

**4** Through bolt with domed head and anti-tamper, non-removable shearnut.

**5** UV resistant, perma-place plastic post cap.

## System Features

- ✓ Anti climb mesh configuration
- ✓ High security
- ✓ Good through-visibility - CCTV friendly
- ✓ Safe to public areas
- ✓ Durable/ easy to install

Full range of related products available

## Applications Include

- ✓ High risk areas
- ✓ Railways
- ✓ Sports stadia
- ✓ Commercial/ industrial sites
- ✓ Government installations

## Mesh Panel Fencing System

The Fastmesh-358™ perimeter system is the first point of call where securing your site/ property is required. The wire configuration provides an "anti-climb" and cutting deterrent whilst allowing a clear view to the other side of the perimeter system. There are no sharp edges or areas of potential trapping areas which means this system is suitable for all applications—from schoolground to airport/ seaport.

Aesthetically pleasing, easy to install and security to meet almost all requirements.



+44(0)1922 623 222 | [info@fastlinesteel.co.uk](mailto:info@fastlinesteel.co.uk) | [www.fastlinesteel.co.uk](http://www.fastlinesteel.co.uk)


# Fastmesh-358™

When Security Matters



## Fastmesh-358™ Specification/ details 2518mmW panel

| Panel Height | Post Section | Post Centres | Wire D. (H/V)* | Mesh Pattern  | Fixing Method |
|--------------|--------------|--------------|----------------|---------------|---------------|
| 1.217m       | 60x60x2mm    | 2.470m       | 4/4mm          | 12.7 x 76.2mm | Clamp bar **6 |
| 1.817m       | 60x60x2mm    | 2.470m       | 4/4mm          | 12.7 x 76.2mm | Clamp bar **7 |
| 2.017m       | 60x60x2mm    | 2.470m       | 4/4mm          | 12.7 x 76.2mm | Clamp bar **8 |
| 2.134m       | 60x60x2mm    | 2.470m       | 4/4mm          | 12.7 x 76.2mm | Clamp bar **8 |
| 2.440m       | 60x60x2mm    | 2.470m       | 4/4mm          | 12.7 x 76.2mm | Clamp bar **9 |
| 2.700m       | 60x60x2mm    | 2.470m       | 4/4mm          | 12.7 x 76.2mm | Clamp bar **9 |
| 3.000m       | 80x40x2mm    | 2.470m       | 4/4mm          | 12.7 x 76.2mm | Clamp bar **9 |

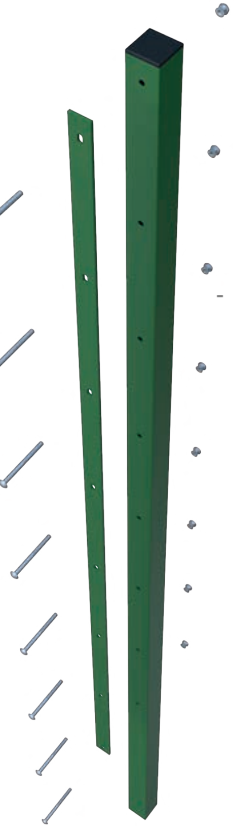

### Panel, Post, Clamp Bars:

The **Fastmesh-358™** system allows for “stepping” to follow the topography of the site without any compromise in security and with no time consuming/ costly modification requirements on site. The full length, pre-slotted clamp bar assists in maintaining a consistent fixing point.

Our custom Fastmesh anti-tamper fixings ensure that even the most difficult of site conditions will not hamper the appearance or performance of the system.

Aesthetically pleasing, easy to install and security to meet almost all requirements.

### System Finish:

Our **Fastmesh-358™** panels are manufactured to BS 4102:1998 and pre-galvanised with a zinc coat weight to conform BS EN 10244-2:2009 class D prior to polyester powder coating.

Fastmesh posts are manufactured in house to ensure conformity, when requested to BS EN 10305:2016 and are galvanised to BS EN 10346:2015.

Panels, posts & clamp bars are polyester powder coated to BS EN 13438:2013.

All items undergo rigorous multi-stage inspections to ensure conformity to the above standards and contribute to our 10 year product guarantee.



This product can be provided to conform to the above standard please state this at the point of enquiry and our team will be more than happy to advise to ensure full compliance to any specification.

See separate **Terms & Conditions** for F10™ Guarantee compliance.

For full details on this or other products, please visit our website [www.fastlinesteel.co.uk](http://www.fastlinesteel.co.uk)

